

Avoid Spiralling Energy Costs with the SpiraLite!

The SpiraLite is a compact, lightweight, low energy, 110V, plug-in, site lighting assembly incorporating a bespoke, 36 watt, 110V, spiral compact fluorescent with a light output of 2340 lumens. The light output is enhanced by the incorporation of a highly polished reflector, which makes the SpiraLite a safe, efficient and economic alternative to traditional Tungsten Halogen (TH) floodlights for task lighting and local area floodlighting. The electricity cost to supply a 36W SpiraLite for a 10 hour shift is under 4 pence, which compares to 50 pence per shift for a 500W TH floodlight (based on a cost of 10 pence per kilowatt hour). The lamp life of the 36W CFL is over 6000 hours, which is far in excess of the practical life of a TH tube. The savings in the cost of electricity, replacement lamps and the reduction in carbon emissions make the SpiraLite a very attractive choice. It is also very competitively priced.


The SpiraLite is available in single and twin versions. The single can be supplied on a carry frame or on a cradle bracket for tripod or wall mounting or scaffold mounting with an additional bracket. The twin version is designed for tripod mounting or scaffold mounting with an additional bracket. All versions are pre-wired with an input lead fitted with a 16A 110V plug and come complete with lamp. The overall assemblies are rated to IP44 and are suitable for indoor or outdoor use.



Portable - Part Number S060741



Tripod / Wall Mounting - Part S060742

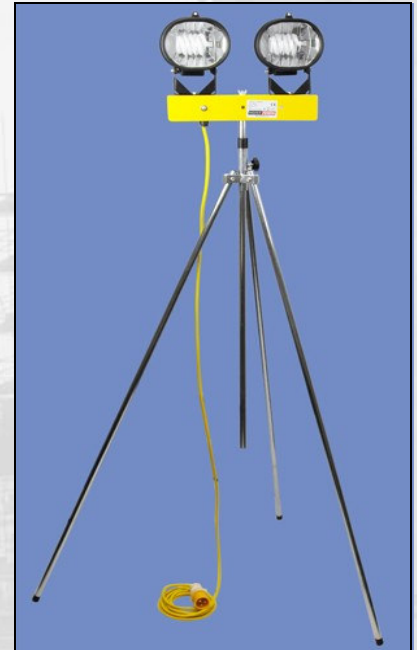

Twin SpiraLite on THCMT Tripod

Part Number	Type	Description
S060741	SPL36/C/110/16	Single SpiraLite, Portable
S060742	SPL36/T/110/16	Single SpiraLite, Wall / Tripod Mounting
S060753	SPL/2/36/T/110/5/16	Twin SpiraLite, Tripod Mounting
S210018	THCMT	Tripod, Telescopic, Swing Leg, 2.3M
S200022	THTP	Telepod Tripod, 1.8M
S060189	Scaffold Clamp	Half Swivel for Single SpiraLite
S060223	Fixing Kit, M8	To fix S060742 to S060189
S120181	Replacement Spiral CFL, 36W, 110V	

Please note: the SpiraLite does not provide an "instant" light source. Once plugged-in, it takes approximately 1 minute for the full light output to be reached.

THE POWER PROFESSIONALS

HIGHER POWER TRANS POWER SAFE POWER TEM POWER PRO POWER GREEN POWER

- **SOUTH** 1 Thomas Road, Optima Park, Crayford, Kent DA1 4GA Tel: 0845 074 0084 Fax: 0845 074 0085
- **NORTH** Unit 55, Monckton Road Ind Estate, Wakefield WF2 7AL Tel: 0845 074 0086 Fax: 0845 074 0087

www.blakley.co.uk • sales@blakley.co.uk

THE COMPANY RESERVES THE RIGHT TO CHANGE PRODUCTS WITHOUT PRIOR NOTICE.



Cert. No. 902091

HPDS33 - 03/10