

Specifications

Single phase voltage	10kVA - 240V
Frequency	50Hz
R.P.M.	1500
Engine Type	Kubota D1105
Number of Cylinders	3
Power	13,7Hp
Displacement	1123cm ³
Cooling	Water
Starting System	Electric
Fuel	Diesel
Fuel Tank Capacity	116 litres
Operating Hours	60 hrs
Specific Fuel Consumption	265g/kWh
Noise Level	88 Lwa
Maximum Height	9 metres
Raising	Hydraulic
Section	7
Erection Time	<20 seconds
Floodlights	Metal Halide
Power 360,000 lumens	4 x 1000W
Rotation	360°
Min Dimension LxWxH	3600 x 1420 x 2400mm
Max Dimension LxWxH	3600 x 1820 x 2900mm
Weight	1100Kg



WORLDWIDE HEADQUARTERS

Aberafan Road, Baglan Industrial Park,
Port Talbot, West Glamorgan, SA12 7DJ.

Telephone: **01639 777000**. Fax: 01639 777001


www.genset.co.uk

Optional extras

• Perkins or Kubota engines  

• Built-in Spark Arrestor

• Road tow approval for France, Holland, Belgium, Germany & Italy

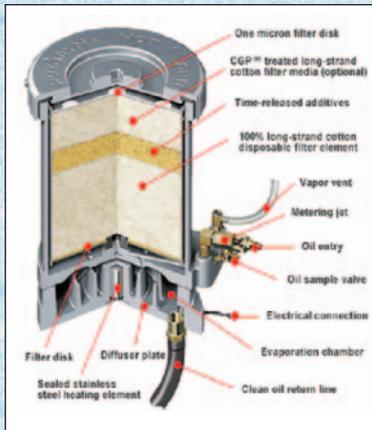

• Puradyn Oil Bypass Filter

Feature: By removing all contaminants, filtered oil is then treated to further remove by evaporation all fuel and water. Clean oil is then returned to the sump.

Benefits:

- Extended oil drain intervals
- Reduces engine wear
- Reduces oil purchases up to 90%
- Reduces oil related maintenance up to 90% - extending service intervals up to 1000 hours
- Improved oil circulation
- Cooler running engines and equipment
- Increased engine efficiency
- Payback typically in less than one year

• RCI Technologies Fuel Purifier

Feature: Removes 100% free water and 95 to 98% of dust, dirt and other contaminants found in all diesel fuel. Unlike other products, the RCI Purifier does not have replaceable, changeable or cleanable filter element, cartridge or bowl. All contaminants are removed before fuel reaches the engines filter system, delivering cleaner fuel (virtually eliminating a clogged fuel filter).

Benefits:

- Increase service intervals up to 1000 hours
- Reduces down time
- Extends the life of the injection pump and the injectors
- Extends the life of the primary filter
- Protects and extends the life of the engine
- Significant improvement in exhaust emissions
- Simple to install



• Selector Panel Switch

Benefit: Allows lights to be changed from generated power to mains power



• 3kVA 110V generating power available

Benefit: Allows you to use as a generator or to add on Linktower lighting

• Linktower Lighting

Benefit: Allows multiple Linktowers to be powered by one VT1



• Full Generator Power Selector Switch

Benefit: Allows maximum Generator power to be taken from socket

• Folding Towing Arm

Benefit: Allows more units to be transported



INVESTOR IN PEOPLE